

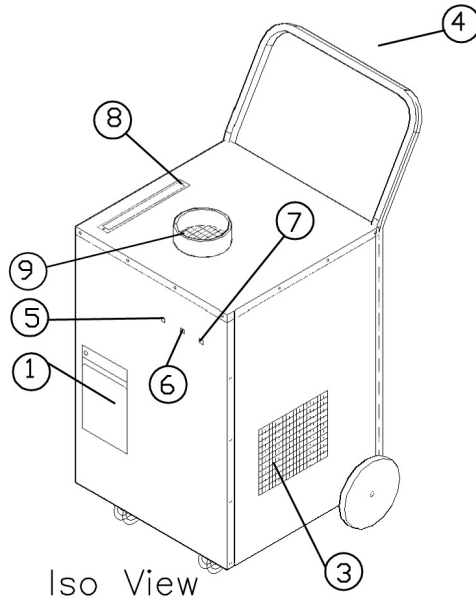
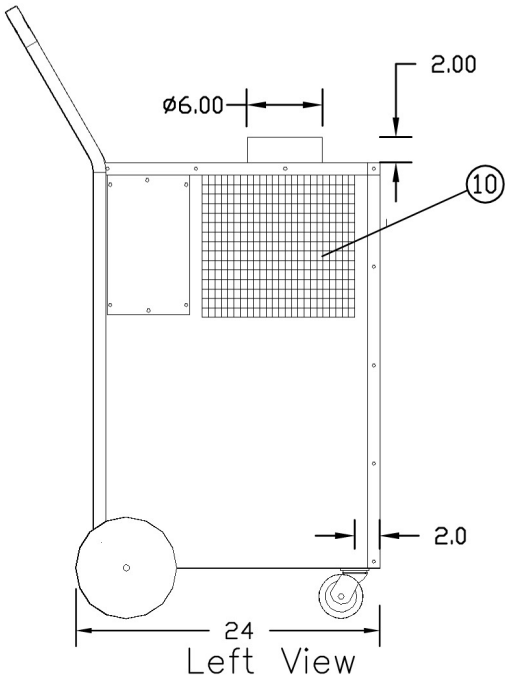


KAM14-1.1 TON

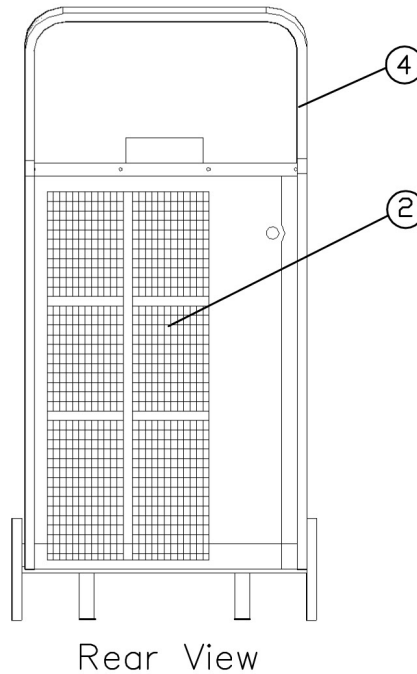

Legend

- 1 Condenser Tank Acces Door
- 2 Condenser Air Intake Grill
- 3 Condenser Hot Air Exhaust Grill
- 4 1" Handle
- 5 2 Position On/Off Switch
- 6 2-Position Fan/Cooler Switch
- 7 2 Position High/Off Switch
- 8 Air Filter Slot
- 9 Cold Air Supply Flange
- 10 Return Air Grill

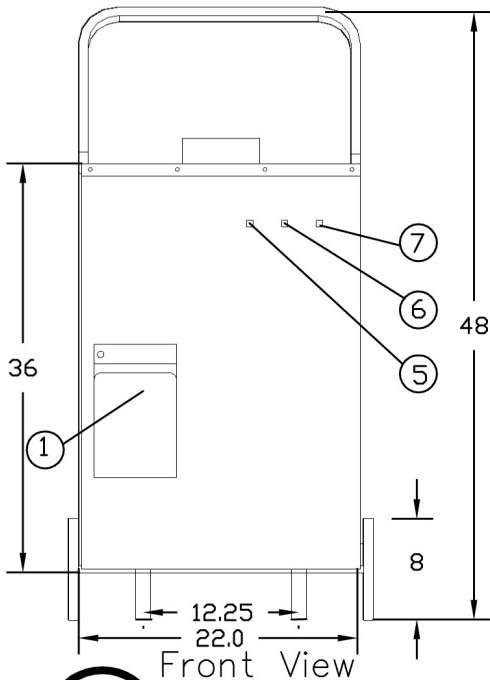

SPECIFICATIONS**Model KAM14 - 1.1 Ton**

COOLING CAPACITY		
	BTU/hr @ 95 F at 60%RH	13,700 (1.1 TON)
COMPRESSOR DATA		
	Compressor Type	HERMETIC ROTARY
	Operating Temperatures	70-95 F .50%RH
	Non-CFC Refrigerant Charge (Lbs.)	421A
FAN DATA		
EVAPORATOR		
	Fan Type (Centrifugal)	DIRECT DRIVE
	Air Flow (CFM), 30', 60', & 90'	30'-550, 60'-495, 90'-425
	Cold Air Supply Flange	1 - 6" Diameter
	Cold Air Supply Maximum Duct in Ft.	100'
	Motor HP	1/3
CONDENSER		
	Fan Type (Centrifugal)	DIRECT DRIVE
	Air Flow (CFM)	600
	Motor HP	1/3
ELECTRICAL DATA		
	Power Supply (Volts)	115/Single Phase
	Current Consumption (Amps)	14.5
	Power Consumption (KW)	1.1
	Maximum Circuit Breaker (Amps)	15
	Minimum Circuit Ampacity (Amps)	15
	Min/Max Voltage	105-125
	Power Cord Gauge/Length	12 AWG/50-Ft. Length
	Plug Configuration	NEMA 5-15
DIMENSIONAL DATA		
Unitary Models	Width x Depth x Height (Inches)	22" x 22" x 48"
	Weight (Lbs)	205
	Shipping Weight (Lbs)	280
	Duct - 50 feet recommended	25
	Total Shipping Weight/w Ceiling Kit	305
SAFETY DEVICE DATA		
	Compressor Overload	INTERNAL
	Fan Motor Overload	AUTOMATIC INTERNAL
	High Pressure Switch	MANUAL
	Compressor Short Cycle	YES
	Automatic Restart	YES
	Switch	2-Position On/Off
	Condensate Tank Overflow	YES